


DATE: JAN. 29, 2010

A DIRECTION B

UNIT: mm

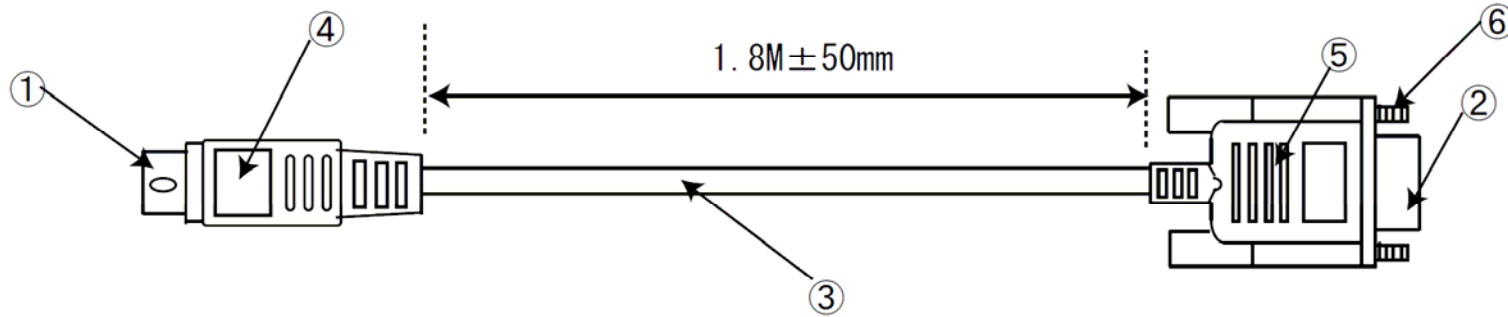

COLOR: IVORY

ATTENTION:

THIS ITEM SHOULD BE USED 低毒 MATERIALS IN ALL.  
BE USED SOLDER WITHOUT LEAD IN.

WIRING: 5 CONDUCTORS (28 AWG) + DRAIN

	A	B	
RTS	1	8	CTS
CTS	2	7	RTS
TXD	3	2	RXD
GND	4	5	GND
RXD	5	3	TXD
SHELL		SHELL	DRAIN WIRE

INSPECTION HEAD:

1. APPEARANCE  
CRACK, TRANSFORMATIONS,  
DIRT, RUST

2. STRUCTURE  
SHAPE, LENGTH, MATERIALS,  
PARTS, FOLLOWING  
DRAWINGS.

3. WIRING  
ANY OPEN, SHORT, MISSED  
WIRING AND INTERMITTENT  
WIRING ARE NOT PERMITTED.

4. PACKING (STANDARD)  
PUT INTO A POLY BAG PER  
1 pcs. AFTER TIED A POINT  
WITH BAND.

No.	MATERIALS	DETAILS	Q'ty
①	CONNECTOR "A"	MIN. DIN 8 M, Ni PLATED	1
②	CONNECTOR "B"	DB 9 F, Ni PLATED	1
③	CABLE	UL 2464, 5C (28 AWG), AL MYLAR SHIELD	1
④	HOOD "A"	MOLDED	1
⑤	HOOD "B"	MOLDED	1
⑥	THUMB SCREW	NO. 4-40	2
⑦			
⑧			
⑨			
⑩			
⑪			
⑫			

ITEM NO.	APD.	DES	DWN
<b>M-877</b>			

株式会社ラウンド